

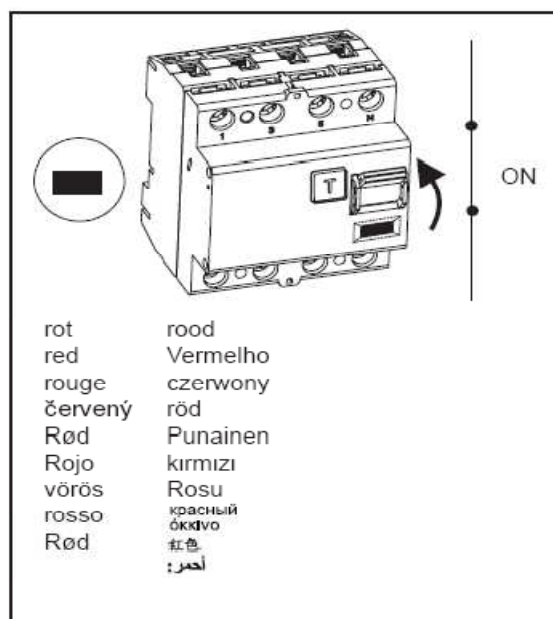


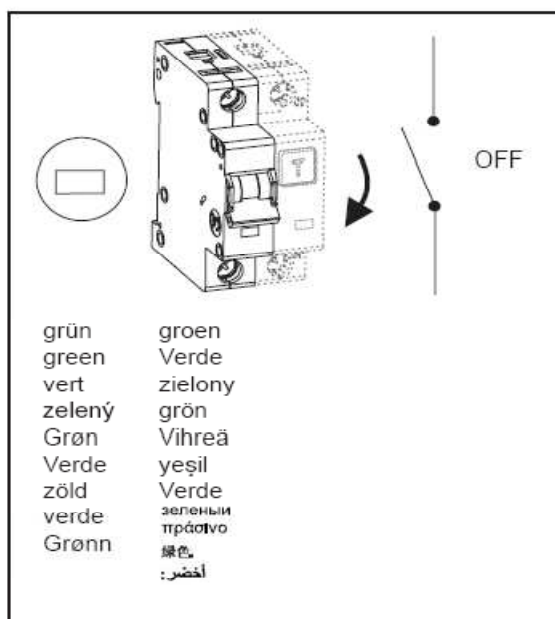

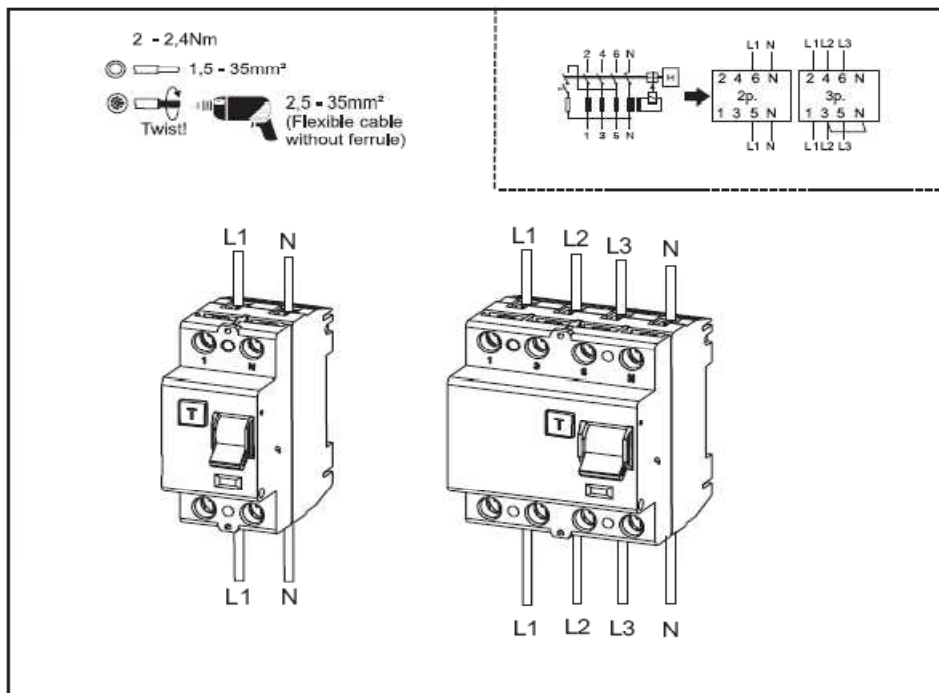



### Additional Information for Series BMSI:

Supplementary Protector  
Technical Data

USA/Canada  
UL 1077

1 phase (series-fuse 100A):  
5 kA - 277 V ~ 60 Hz  
3 phase (series-fuse 100 A):  
5 kA - 277/480 V ~ 60 Hz

Tripping Current:  
155 % of rated current  
at 30°C  
Cu 75°C, min. AWG 18, max. AWG 4, Nm 2.4

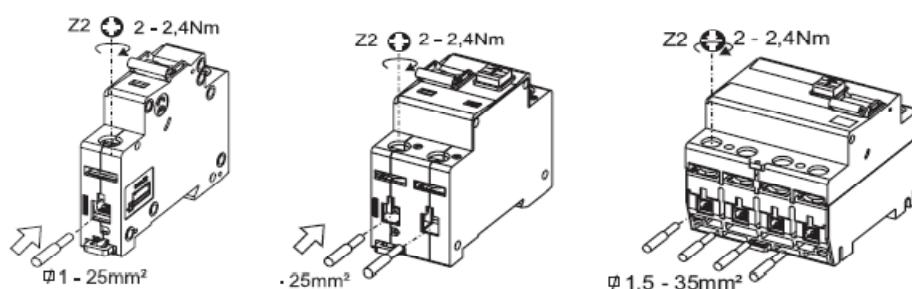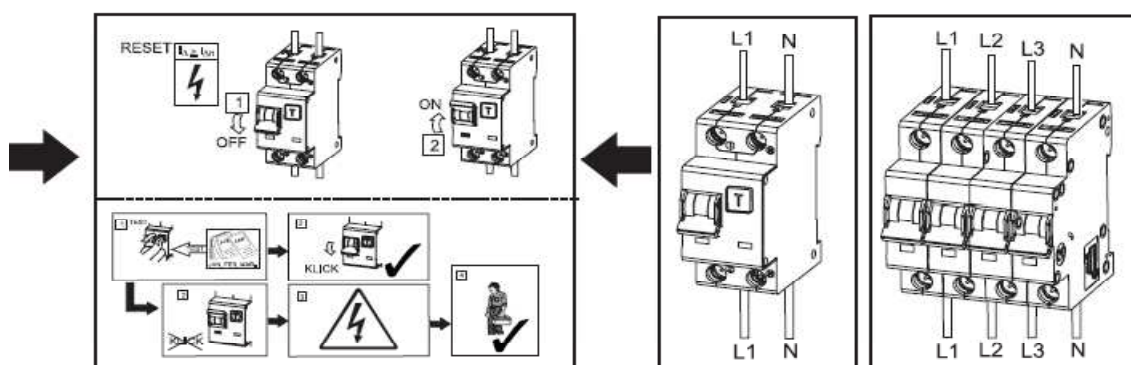

### Additional Information for RCD's:

Maximum back-up fuse

$I_n = 25-63A$

$I_n = 80A$

$I_n = 100A$

Short circuit

63 A gG/gL

80 A gG/gL

100 A gG/gL

### Zusatzinformation für FI's:

Max. zulässige Vorsicherung

$I_n = 25-63A$

$I_n = 80A$

$I_n = 100A$

Kurzschluss

63 A gG/gL

80 A gG/gL

100 A gG/gL